

XViu

Pre-installation Data Sheet

Bathtubs

Installation instructions

PLANNING

Before starting the installation, plan the layout in detail, taking the site conditions into consideration.

TARGET READERSHIP AND QUALIFICATIONS

All work associated with the installation and water connection may only be undertaken by a qualified plumber.

SAFETY INSTRUCTIONS

Incorrect handling/transport may result in product damage.

The metal frame is not resilient.

- > Never hold the tub by the metal frame.

Improper transport can cause damage to the product and/or property damage, e.g. leaks.

- > Wear appropriate protective clothing.
- > Avoid knocks.

Risk of product and/or property damage!

The breach of local and country-specific regulations and standards can cause damage to the product and/or property damage.

- > Observe the local installation regulations and any country-specific standards at all times.

Duravit AG assumes no liability for the consequences of improper handling or improper transport.

WATER INSTALLATION

- Connections for the water supply and drains must be in compliance with the currently valid standards and public regulations.
- Position the water drain (DN 50) flush to the mounting surface or out of the wall directly above the mounting surface; see drawing for recommended area.

INSTALLATION LOCATION / INSTALLATION ROOM



- > Make sure that the installation location fulfils the following criteria

Doors / external access	<ul style="list-style-type: none"> • Ensure that doors or other access openings are large enough to accommodate transport dimensions, keeping in mind the weight and need for sufficient manoeuvring room.
Required area	<ul style="list-style-type: none"> • Allow for enough space around the bathtub for the installation.
Floor	<ul style="list-style-type: none"> • Completely level. • At a right angle to the wall. • Note the overall strength of the floor structure including the floor finish. • There must not be any underfloor heating under the tub. • Install tubs after the tiles. (Top edge of finished floor). • Tolerances for acrylic: As a result of the manufacturing process, deviations from the nominal dimensions may occur within the limits specified in the DIN 198 standard. Please take this into account in your planning.

Pre-installation - XViü # 700443

1800 x 800 x 610

Design by sieger design

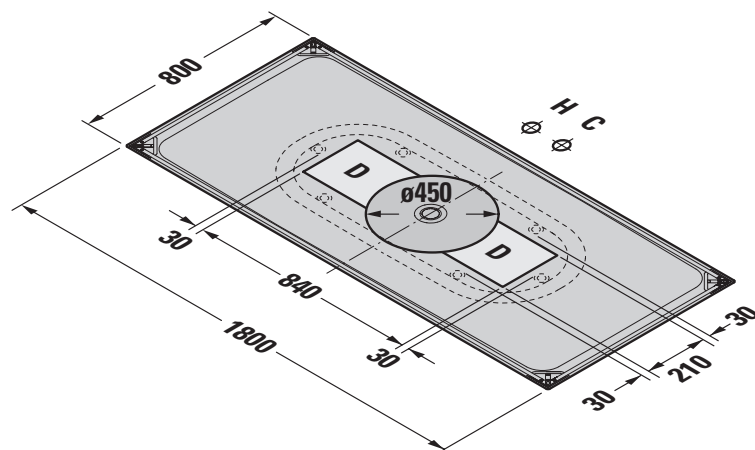

Siphon for bathtub # 700443

- H Hot water connection
- C Cold water connection
- D Drain/waste connection

Technical data

Bathtub with metal frame	Height	Net weight kg	Floor load kg/m ²	Shipping weight kg	Shipping dimensions cm l x w x h	Order no.
Metal frame champagne matt	610	67.0	256	129.0	200 x 105 x 87	700443 00 0 B1 0000
Metal frame black matt	610	67.0	256	129.0	200 x 105 x 87	700443 00 0 B2 0000

DURAVIT AG
P.O. Box 240
Werderstr. 36
78132 Hornberg
Germany
Phone +49 78 33 70 0
Fax +49 78 33 70 289
info@duravit.com
www.duravit.com

