


requesto /
osat /
né diely /
schimb
пови /

This exploded view diagram illustrates the components of a kitchen faucet assembly. The parts are numbered as follows:

- 1**: A rectangular faucet spout with a curved front edge.
- 2**: A circular cap for the spout.
- 3**: A cylindrical cartridge with a handle on top.
- 4**: A cylindrical base for the cartridge.
- 5**: A large, cylindrical mounting bracket with a flange at the top.
- 6**: A circular decorative cap for the top of the mounting bracket.
- 7**: A small, rectangular decorative piece.
- 8**: A circular flange or gasket.
- 9**: A curved, L-shaped mounting bracket.
- 10**: A long, thin, cylindrical rod with a threaded end.
- 11**: A small, cylindrical decorative piece.
- 12**: A long, thin, cylindrical rod with a threaded end.

The diagram shows the assembly sequence: the mounting bracket (5) is attached to the faucet body. The cartridge (3) is inserted into the bracket, and the cap (2) is placed over it. The spout (1) is attached to the top of the cartridge. The decorative cap (6) is placed over the top of the mounting bracket. The mounting bracket (5) is secured to the faucet body with the rod (10) and the bracket (9). The rod (12) is used to secure the mounting bracket (5) to the faucet body. The rod (11) is used to secure the mounting bracket (5) to the faucet body.

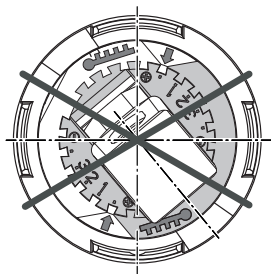

www.idealstandardinternational.com











Ideal Standard

1220 / A 868 823
Made in Germany

Ceramix

A 6543 ..

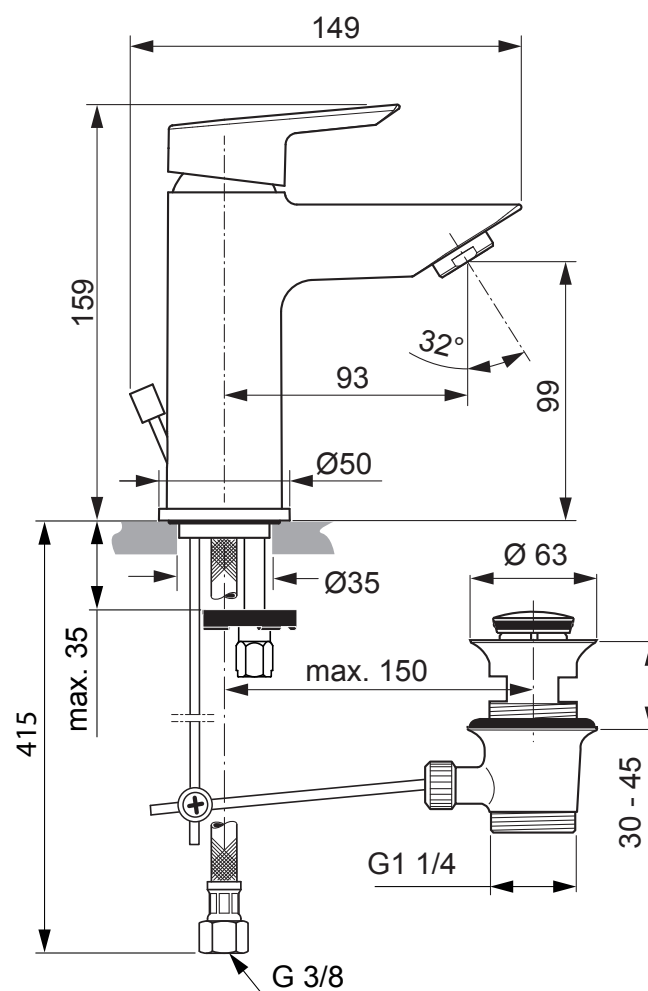

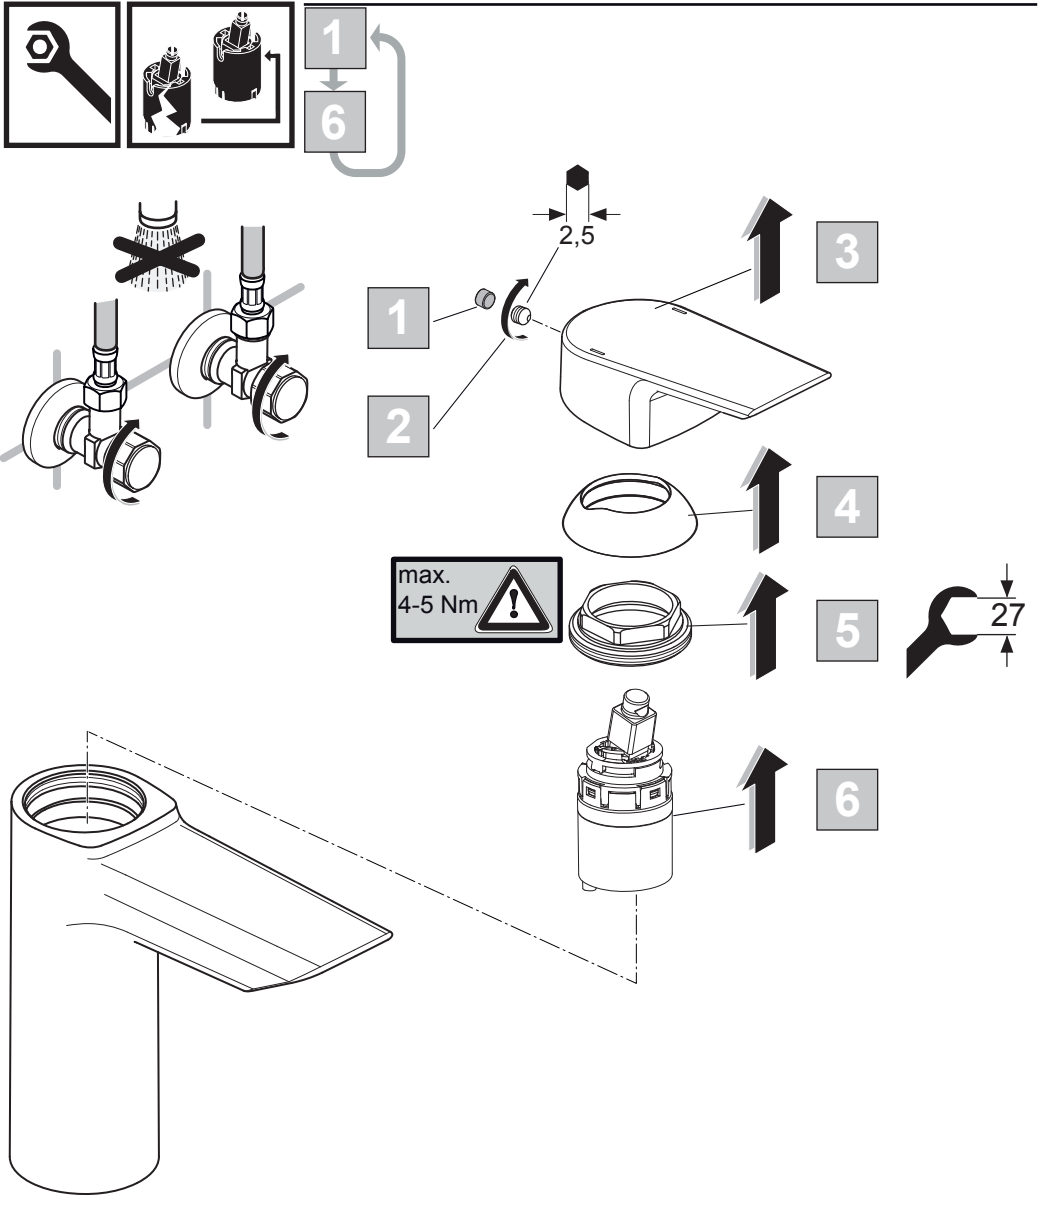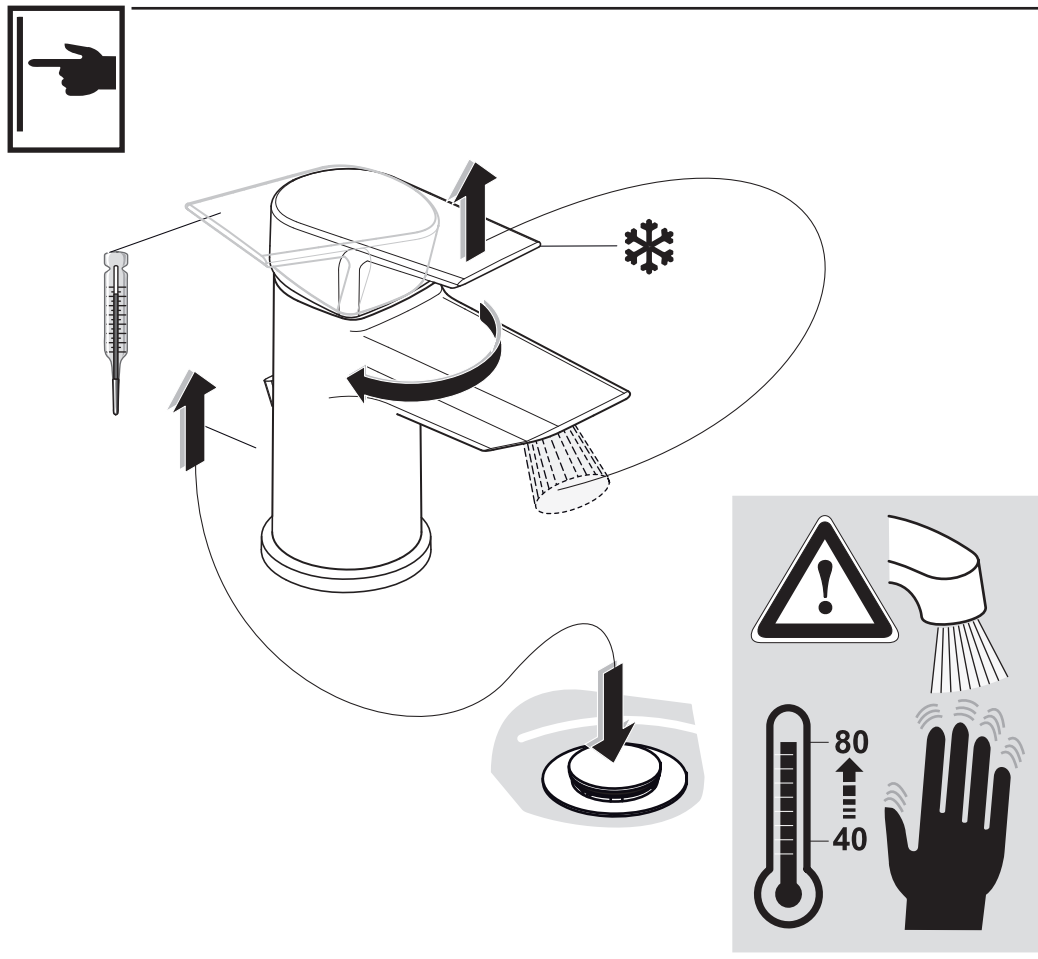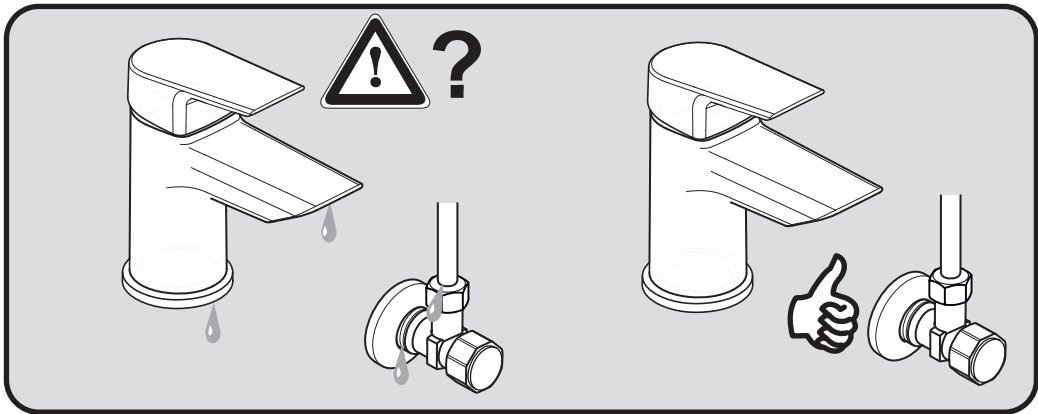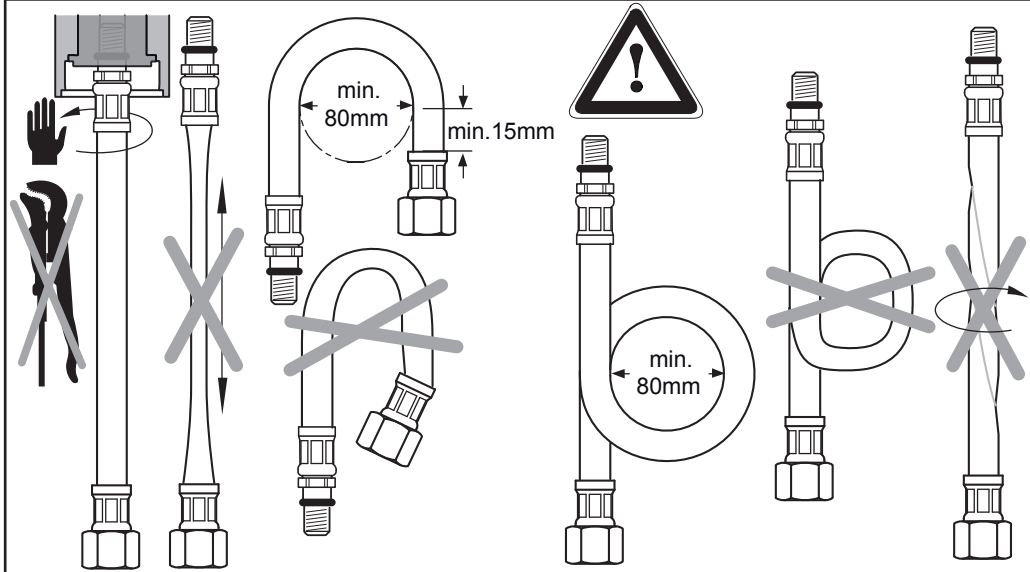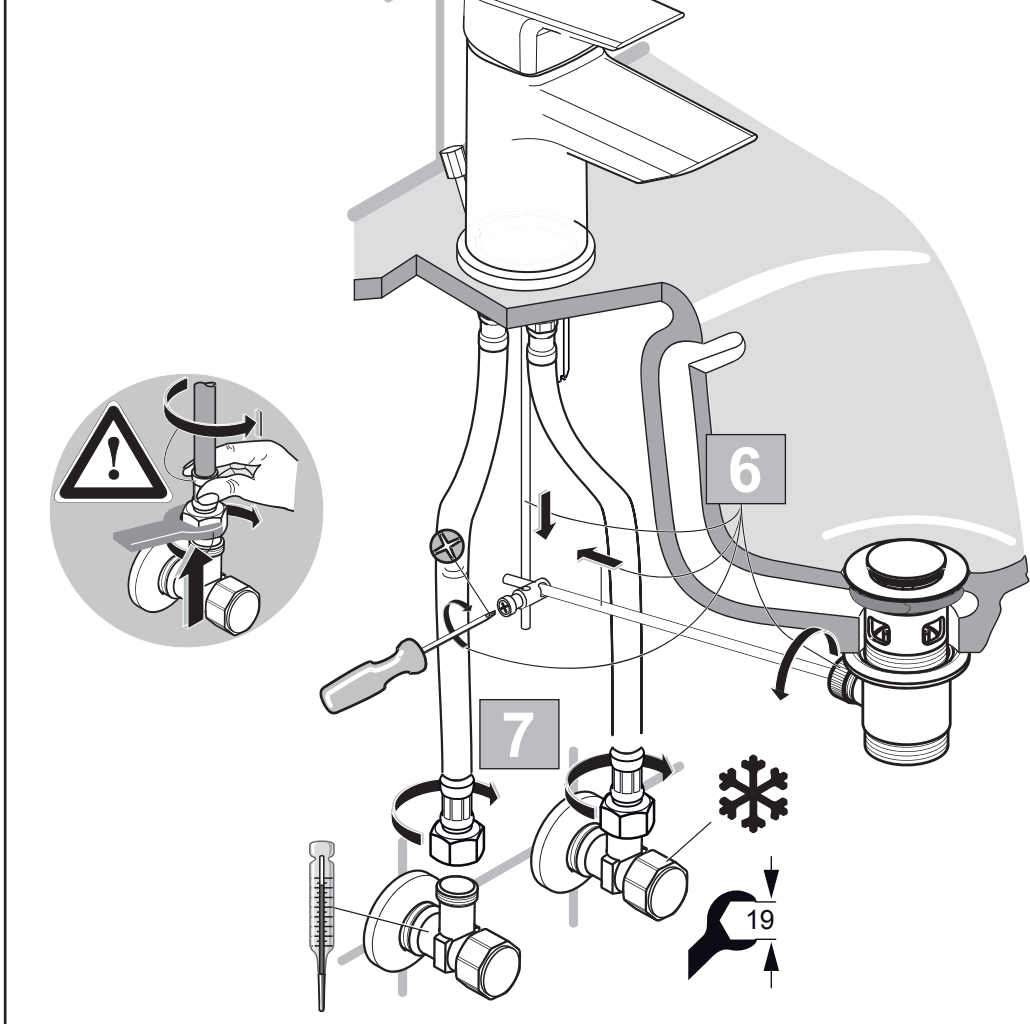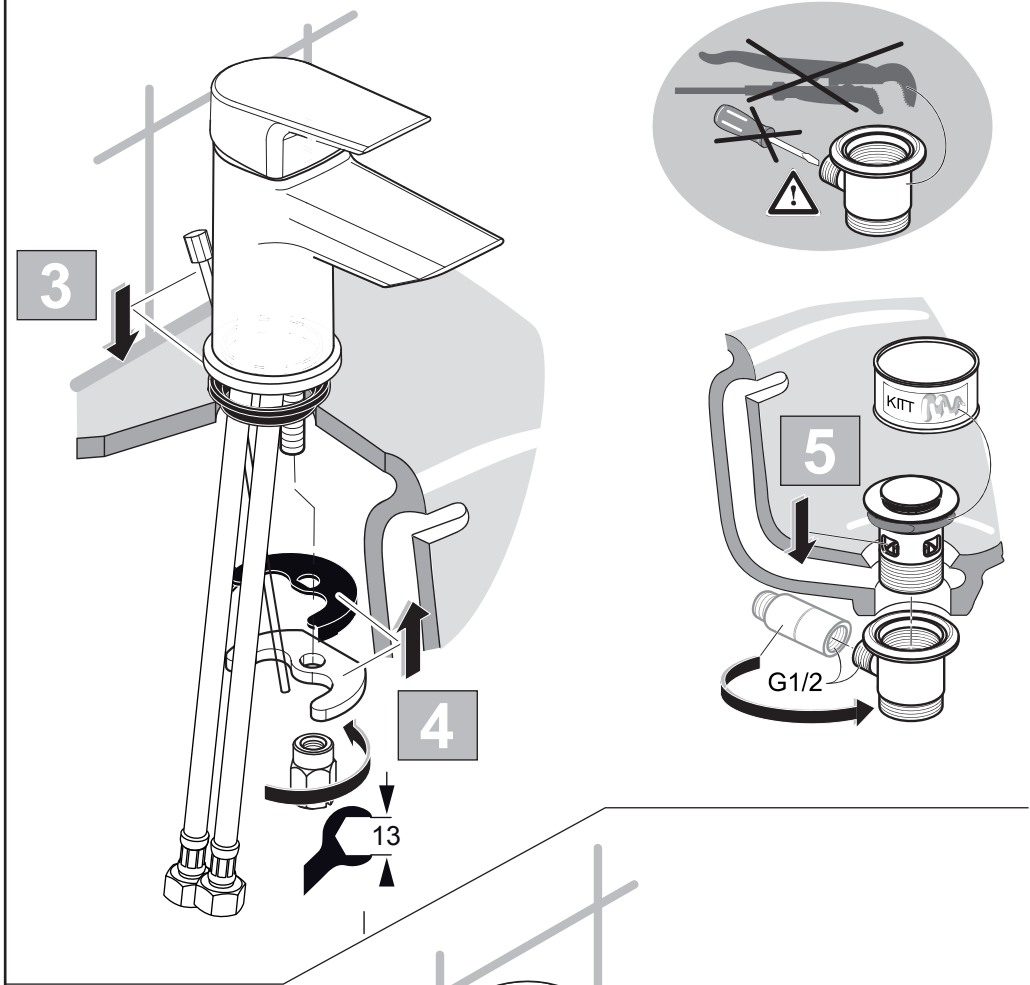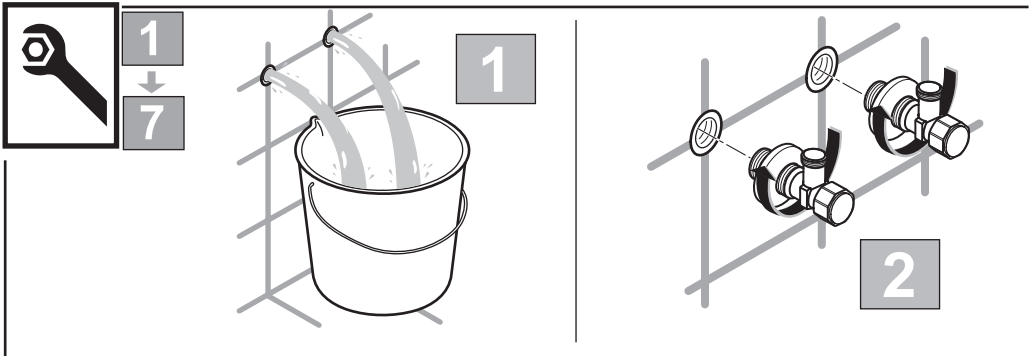

	P	bar					Q (3 bar)
	T	°C					l/min 5