




Ordering spares / Ersatzteil - Regelung / Pièces de rechange / Parti di ricambio / Lista de recambios / Onderdelen bestellen (NL/B) / Κωδικοί Ανταλλακτικών / Bestilling af reservedele / Beställning av reservdelar / Bestilling av reservedeler / Резервни части / Запчасти / Części zapasowe / Pieśe de schimb / Rendelhető alkatrészek / Запасні частини / Резервни делови / Резервни делови / Atsarginių dalių / Tellitavad varuosad / Rezerves daļas / Náhradní díly / Náhradné diely / Yedek parça siparişi / Nadomestni deli






XX = AA, AD,

- | | |
|----------------------|------------------|
| 1 - B 961813 XX | 9 - A 962575 NU |
| 2 - A 963751 NU | 10 - B 961807 NU |
| 3 - B 961815 XX | 11 - A 962005 NU |
| 4 - B 961814 NU | 12 - B 960944 NU |
| 5 - A 861397 NU | 13 - B 960845 NU |
| 6 - B 961582 NU | 14 - A 960911 NU |
| 7 - B 961816 XX | 15 - B 960510 NU |
| 8 - B 961817 XX - 1F | |
| B 961818 XX - 2F | |

BD471..

 P 0.2 bar	 P 1.5 to 6 bar	7 Lpm
---	--	-------



 P	bar	 MAX. 10 0,5	 5 1	 Q (3 bar)
 T	°C	 MAX. 80	 65 40	 l/min 9

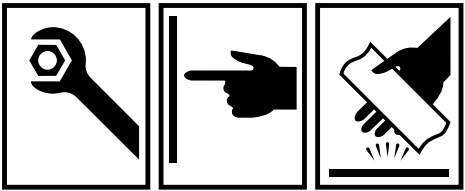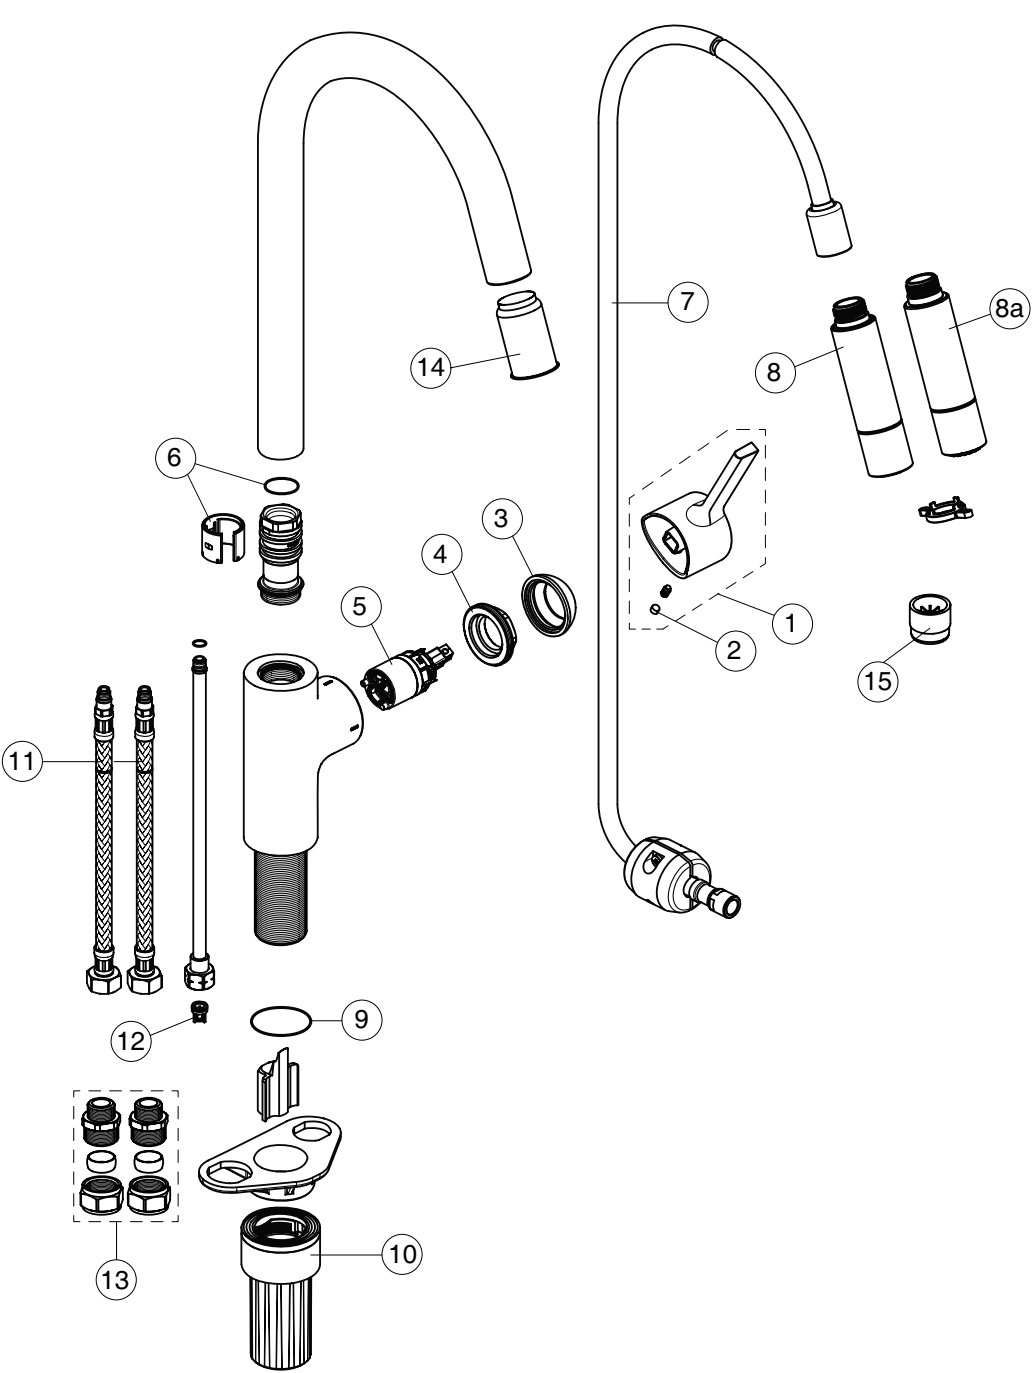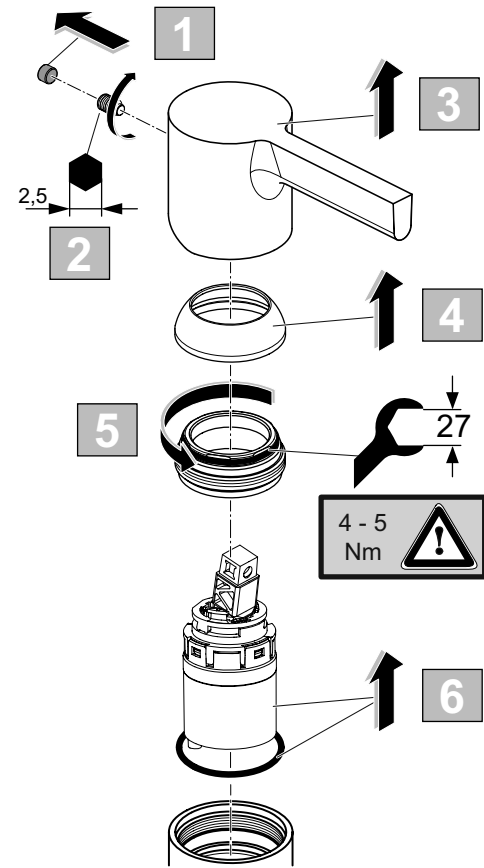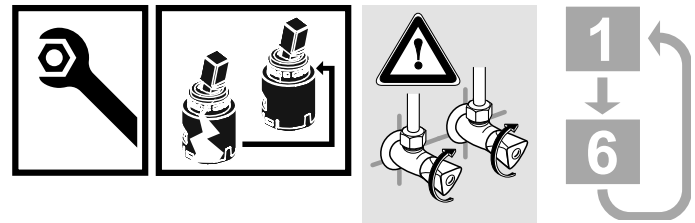


GUSTO

Ideal Standard





















09.2022 / B565234

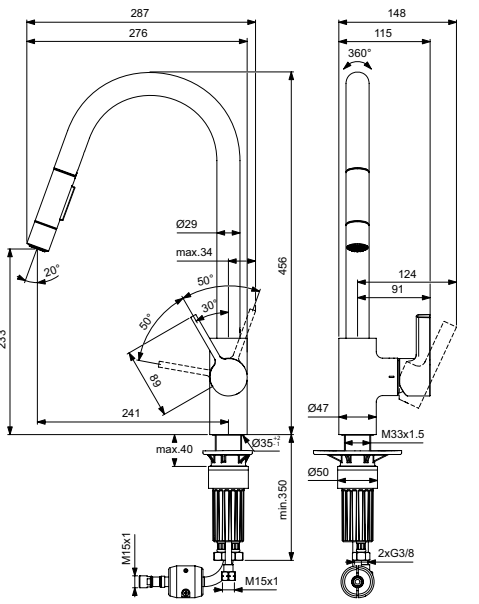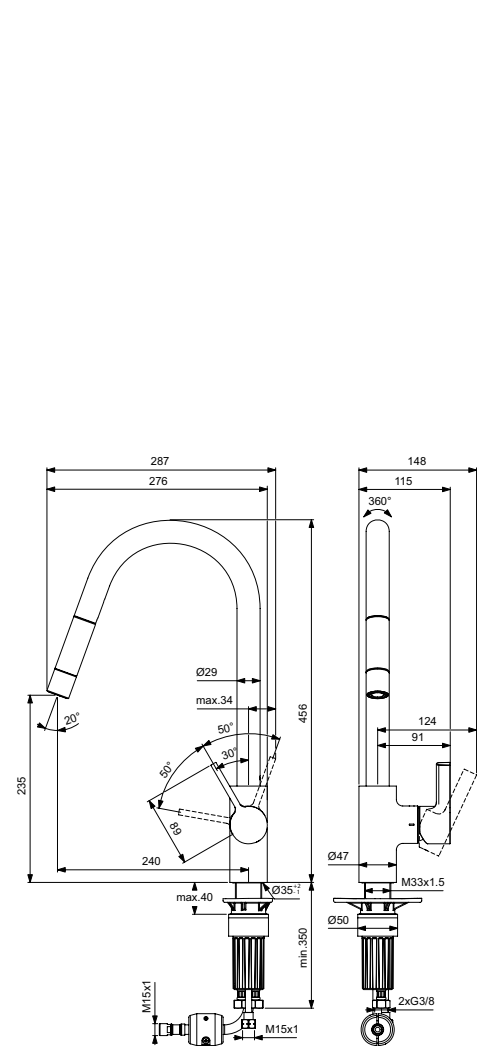

B D416 ..
B D471 ..

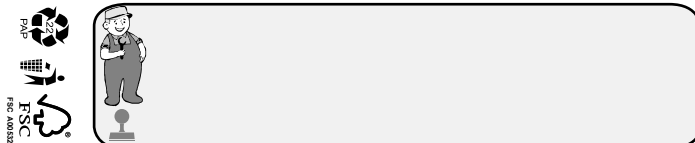

Ideal Standard International NV
Corporate Village – Gent Building
Da Vincilaan 2
1935 Zaventem
Belgium
<http://www.idealstandardinternational.com>

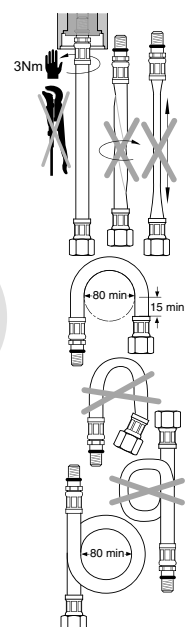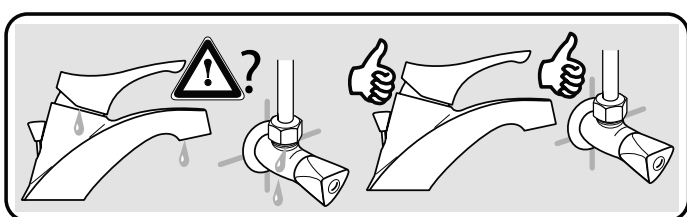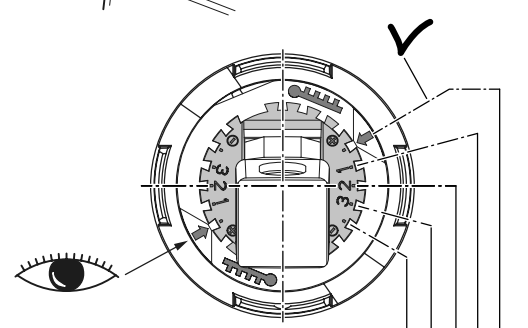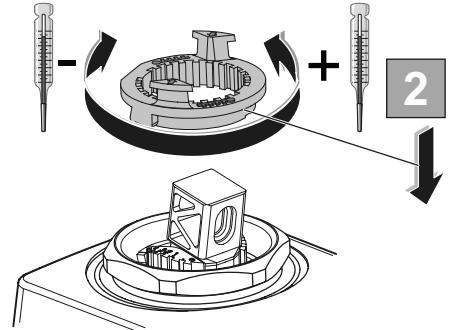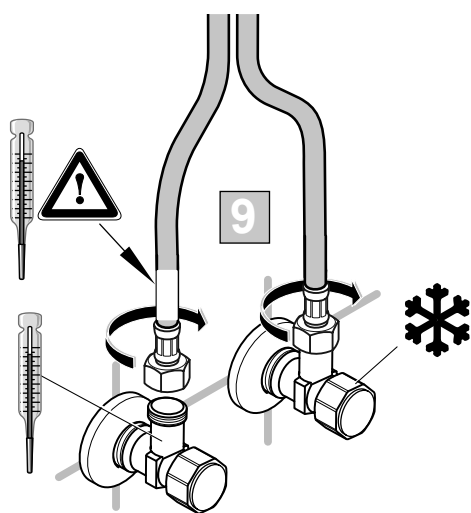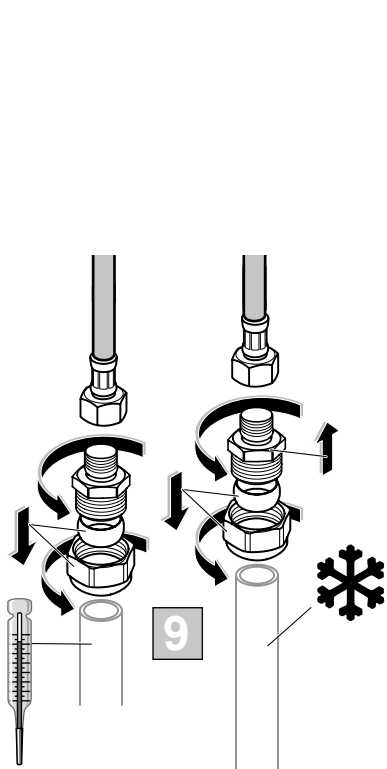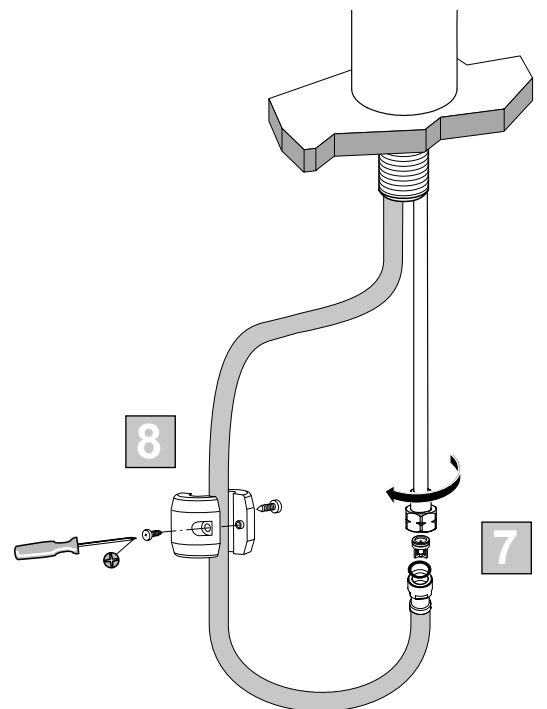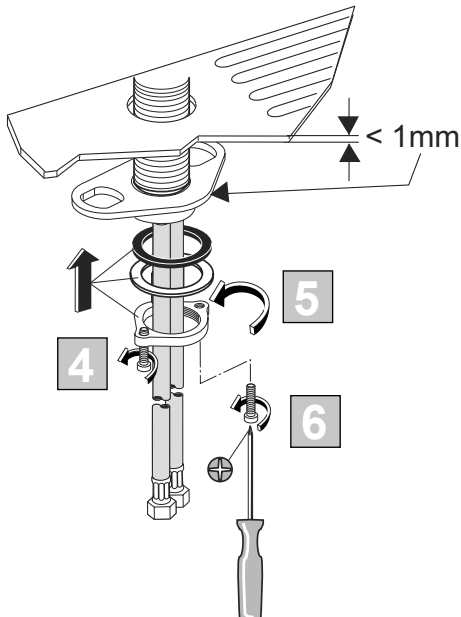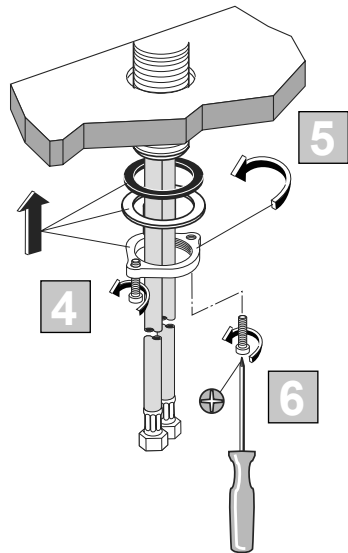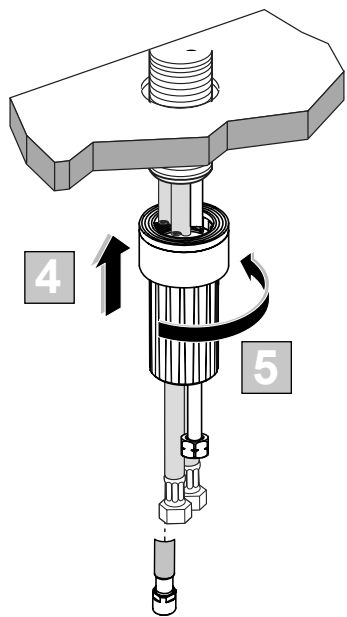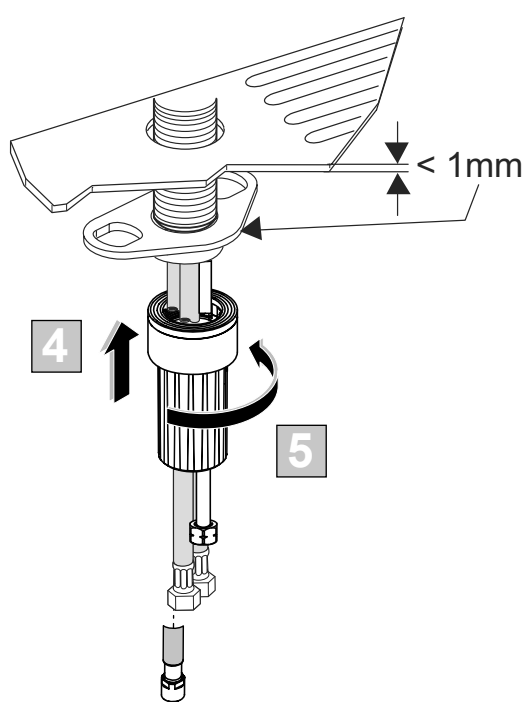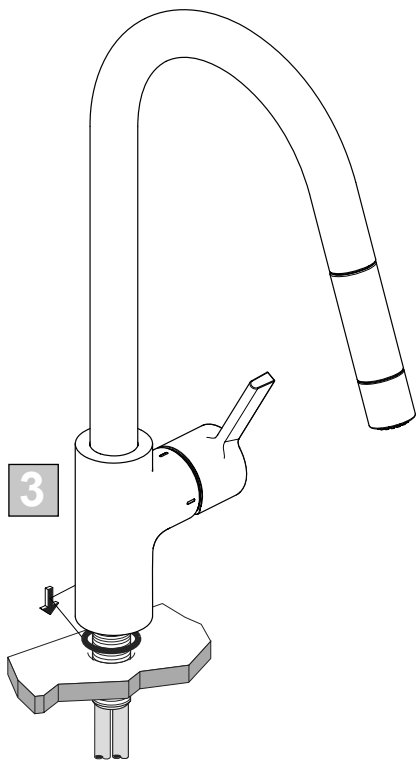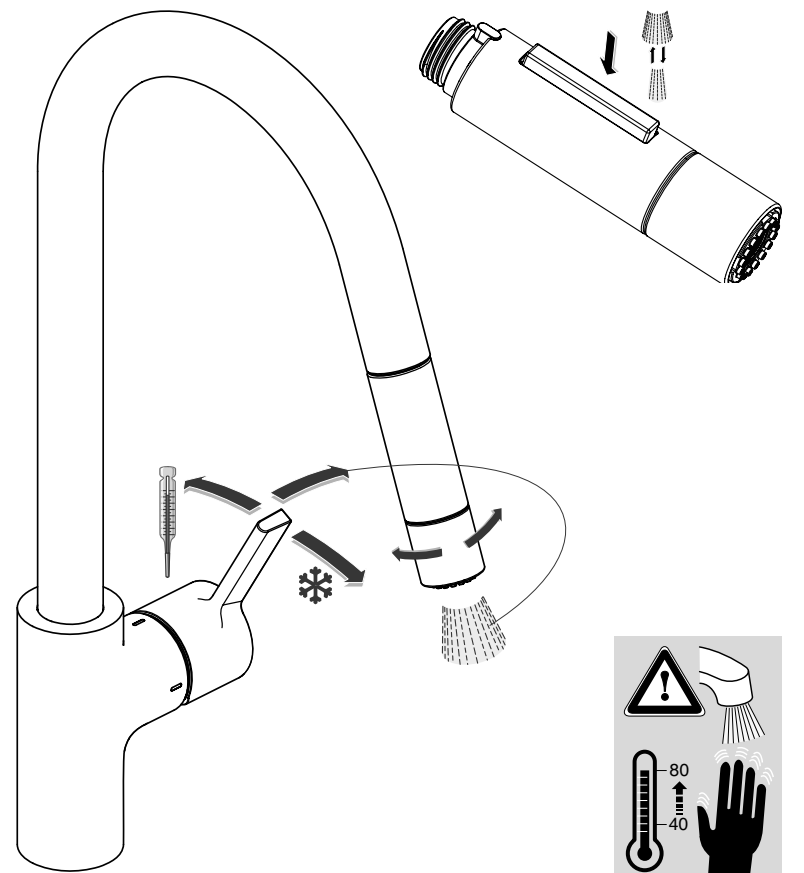

 P 0,3 MPa 3 bar	 T STOP		4	3	2	1	0
			°C	°C	°C	°C	°C
	50°C	15°C	27	33	41	48	50
	65°C	15°C	33	42	53	63	65
	85°C	15°C	41	53	68	83	85